

PTE 0809A - 0812A

Open koeltorens


Technische gegevens

REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

[PTE cooling tower performance at standard conditions](#)

Laatst bijgewerkt: 27/07/2024

PTE 0809A - 0812A

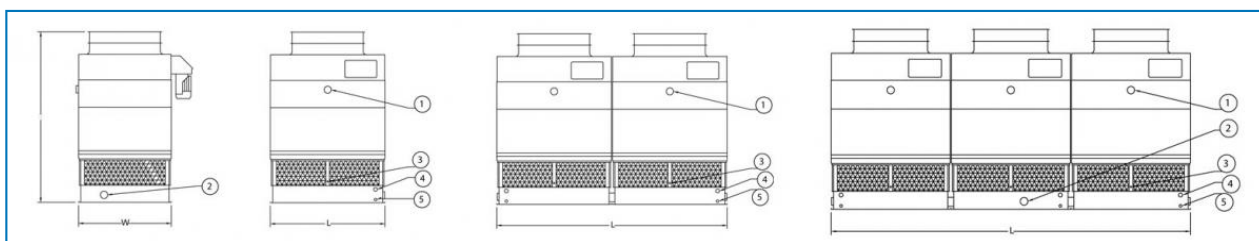

1. Water in; 2. Water uit; 3. Make-up; 4. Overloop; 5. Afvoer.



Model	Gewicht (kg)			Afmetingen (mm)			Luchtdebi et (m ³ /s)	Ventilator motor (kW)	Vloeistof nlaat ND (mm)	Vloeistof itlaat ND (mm)	Suppletie ND (mm)
	Bedrijfsge wicht (kg)	Transport gewicht (kg)	Zwaarste gedeelte (kg)	L	W	H					
PTE 0 809A-3 J-L1	3340	2260	880	2737	2394	4002	17.5	(1x) 5.5	(1x) 200	(1x) 200	(1x) 40
PTE 0 809A-3 K-L1	3350	2270	890	2737	2394	4002	19.2	(1x) 7.5	(1x) 200	(1x) 200	(1x) 40
PTE 0 809A-3 L-L1	3390	2310	930	2737	2394	4002	21.8	(1x) 11.0	(1x) 200	(1x) 200	(1x) 40
PTE 0 809A-4 K-L1	3480	2400	920	2737	2394	4307	18.0	(1x) 7.5	(1x) 200	(1x) 200	(1x) 40
PTE 0 809A-4 L-L1	3520	2440	920	2737	2394	4307	20.4	(1x) 11.0	(1x) 200	(1x) 200	(1x) 40
PTE 0 809A-4 M-L1	3530	2450	920	2737	2394	4307	22.2	(1x) 15.0	(1x) 200	(1x) 200	(1x) 40
PTE 0 812A-3 L-L1	4210	2690	940	3651	2394	4116	26.8	(1x) 11.0	(1x) 200	(1x) 200	(1x) 40
PTE 0 812A-3 M-L1	4210	2700	940	3651	2394	4116	29.2	(1x) 15.0	(1x) 200	(1x) 200	(1x) 40
PTE 0 812A-3 N-L1	4250	2730	940	3651	2394	4116	31.5	(1x) 18.5	(1x) 200	(1x) 200	(1x) 40
PTE 0 812A-4 M-L1	4370	2850	1090	3651	2394	4421	27.2	(1x) 15.0	(1x) 200	(1x) 200	(1x) 40
PTE 0 812A-4 N-L1	4400	2880	1090	3651	2394	4421	29.1	(1x) 18.5	(1x) 200	(1x) 200	(1x) 40
PTE 0 812A-4 O-L1	4410	2900	1090	3651	2394	4421	30.9	(1x) 22.0	(1x) 200	(1x) 200	(1x) 40
PTE 0 809A-3 J-L2	6640	4470	880	5480	2394	4307	35.3	(2x) 5.5	(2x) 200	(2x) 200	(1x) 40
PTE 0 809A-3 K-L2	6650	4480	890	5480	2394	4307	38.7	(2x) 7.5	(2x) 200	(2x) 200	(1x) 40
PTE 0 809A-3 L-L2	6680	4520	930	5480	2394	4307	43.9	(2x) 11.0	(2x) 200	(2x) 200	(1x) 40
PTE 0 809A-4 K-L2	6910	4750	920	5480	2394	4611	36.2	(2x) 7.5	(2x) 200	(2x) 200	(1x) 40
PTE 0 809A-4 L-L2	6950	4790	920	5480	2394	4611	41.1	(2x) 11.0	(2x) 200	(2x) 200	(1x) 40
PTE 0 809A-4 M-L2	6960	4800	920	5480	2394	4611	44.7	(2x) 15.0	(2x) 200	(2x) 200	(1x) 40
PTE 0	8320	5290	940	7304	2394	4421	54.4	(2x)	(2x)	(2x)	(1x) 40



812A-3 L-L2								11.0	200	200	
PTE 0 812A-3 M-L2	8330	5300	940	7304	2394	4421	59.4	(2x) 15.0	(2x) 200	(2x) 200	(1x) 40
PTE 0 812A-3 N-L2	8360	5330	940	7304	2394	4421	63.5	(2x) 18.5	(2x) 200	(2x) 200	(1x) 40
PTE 0 812A-4 M-L2	8630	5600	1090	7304	2394	4726	55.2	(2x) 15.0	(2x) 200	(2x) 200	(1x) 40
PTE 0 812A-4 N-L2	8660	5630	1090	7304	2394	4726	59.0	(2x) 18.5	(2x) 200	(2x) 200	(1x) 40
PTE 0 812A-4 O-L2	8680	5650	1090	7304	2394	4726	62.3	(2x) 22.0	(2x) 200	(2x) 200	(1x) 40
PTE 0 809A-3 J-L3	9930	6690	880	8275	2394	4611	53.4	(3x) 5.5	(3x) 200	(3x) 200	(2x) 40
PTE 0 809A-3 K-L3	9940	6700	890	8275	2394	4611	58.5	(3x) 7.5	(3x) 200	(3x) 200	(2x) 40
PTE 0 809A-3 L-L3	9980	6740	930	8275	2394	4611	66.3	(3x) 11.0	(3x) 200	(3x) 200	(2x) 40
PTE 0 809A-4 K-L3	10340	7100	920	8275	2394	4916	54.8	(3x) 7.5	(3x) 200	(3x) 200	(2x) 40
PTE 0 809A-4 L-L3	10380	7140	920	8275	2394	4916	62.0	(3x) 11.0	(3x) 200	(3x) 200	(2x) 40
PTE 0 809A-4 M-L3	10390	7140	920	8275	2394	4916	67.5	(3x) 15.0	(3x) 200	(3x) 200	(2x) 40
PTE 0 812A-3 L-L3	12440	7890	940	11018	2394	4726	82.1	(3x) 11.0	(3x) 200	(3x) 200	(2x) 40
PTE 0 812A-3 M-L3	12440	7900	940	11018	2394	4726	89.7	(3x) 15.0	(3x) 200	(3x) 200	(2x) 40
PTE 0 812A-3 N-L3	12480	7930	940	11018	2394	4726	95.9	(3x) 18.5	(3x) 200	(3x) 200	(2x) 40
PTE 0 812A-4 M-L3	12900	8350	1090	11018	2394	5031	83.3	(3x) 15.0	(3x) 200	(3x) 200	(2x) 40
PTE 0 812A-4 N-L3	12930	8380	1090	11018	2394	5031	89.1	(3x) 18.5	(3x) 200	(3x) 200	(2x) 40
PTE 0 812A-4 O-L3	12950	8400	1090	11018	2394	5031	94.0	(3x) 22.0	(3x) 200	(3x) 200	(2x) 40